

**The best end result begins
with the Herder mowing bucket**



MOWING BUCKET MR



Achieve more with the Herder mowing bucket

Everyone wants a good mowing result, but everyone also wants an outline of the costs. With its fifth generation 'MR' mowing buckets, Herder proves you that you can achieve both. Herder mowing buckets have been developed to perform to the full in all conditions.

This starts with the well thought-out design of the mowing bucket and all of the moving parts. Moreover, exclusive use is made of high-quality materials which guarantee a long lifespan. A unique design, the application of the best materials in combination with quality workmanship gives an unequalled tool. A mowing bucket that performs everywhere and at all times. The MRL Mowing Bucket, a lighter mowing bucket model, is ideal for the Herder Grenadier and medium-sized excavators. The Mowing Bucket MRZ, the heavier version of the mowing bucket, is suitable for wheel and crawler excavators. You can also choose from different widths, from 2.5 to 5.5 metres. You can even reach widths of up to 8.6 metres by combining two mowing buckets. Furthermore Herder has two 'ultra-light' models in its range, with 2 and 2.5 metres working widths. These are ideal for a mini excavator in connection with the weight/stability. You simply achieve more with the Herder mowing bucket.



The Herder mowing bucket can be attached directly to the excavator.



MSFT.B



MRL430.SSHKR



MRZT430.KB



MRZT550.CW20-40



Details - mowing bucket - standard model



Low-maintenance knife head connection with standard long knife attachment.



Cutter bar with spring pressure holder for continuous knife pressure.



The mowing bucket driving gear is fixed by means of 12 bolts.

Comes as standard with low-maintenance self-sharpening T knives.



Mowing bucket options



The volume of the mowing bucket can be increased with extension and side racks.




The mowing bucket can have a Herder connection or an excavator connection as required.



G knives that you can sharpen yourself are available as an option. Herder can supply special grinders for them if desired.



A mowing bucket with a working width of 8.60 metres helps you achieve more in less time.

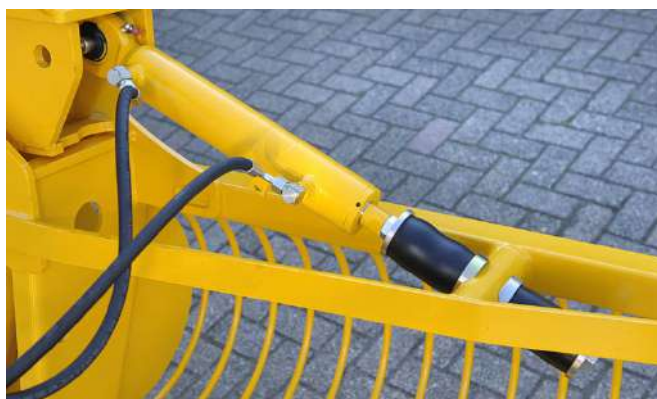

With the tilt cylinder you can keep the transport position inside 3 metres (maximum allowable width) for the 4.3 and 5.5 metre mowing buckets.



TECHNICAL SPECIFICATIONS

| Application | Type/width in cm | Frame height in cm | Oil consumption in L/min. | Weight in kg |
|---|------------------|--------------------|---------------------------|--------------|
| Mini excavators < 5 tonnes | MSFT 200.KB | 40 | approx. 22 | approx. 190 |
| | MSFT 250.KB | 40 | approx. 22 | approx. 215 |
| Midi excavators & tractors 5 - 8 tonnes | MRLT 250.KB | 52 | approx. 40 | approx. 303 |
| | MRLT 300.KB | 52 | approx. 40 | approx. 315 |
| | MRLT 430.KB | 52 | approx. 40 | approx. 403 |
| | MRLT 550.KB | 52 | approx. 40 | approx. 483 |
| Excavators 8 - 17 tonnes | MRZT 250.KB | 52 | approx. 40 | approx. 331 |
| | MRZT 300.KB | 52 | approx. 40 | approx. 360 |
| | MRZT 430.KB | 52 | approx. 40 | approx. 447 |
| | MRZT 550.KB | 52 | approx. 40 | approx. 538 |
| Heavy excavators > 16 tonnes | MRZZT 430.KB | 57 | approx. 40 | approx. |
| | MRZZT 550.KB | 57 | approx. 40 | approx. |

Maximum allowable oil pressure: 170 bar.

AVAILABLE WITH THE FOLLOWING CONNECTION PIECES

| Connection piece | Additional information |
|---|--|
| Standard bucket carrier | Unpainted |
| Quick connection Herder SS | |
| Herder H20 | |
| Herder H20V | |
| Herder H25V | |
| Quick connection; Verachtert Connect'o'maat CW05 | Middle 200 mm, width 180 mm, pin Ø 40 mm |
| Quick connection; Verachtert Connect'o'maat CW10 | Middle 300 mm, width 320 mm, pin Ø 50 mm |
| Quick connection; Verachtert Connect'o'maat CW20-40 | Middle 75 mm, width 560 mm, pin Ø 60 mm |
| Quick connection; Lehnhoff SW01 | |
| Quick connection; Lehnhoff SW03 | |
| Quick connection; Lehnhoff SW08 | |
| Quick connection; Lehnhoff SW10 | |
| Quick connection; Lehnhoff SW21/25 | |
| Quick connection; Atlas T620 / Pladdet | |
| Quick connection; Liebherr SW33/SW48 | |
| Pin connection/ excavator connection | Measurements need to be given |



You will achieve more with Herder



MAAIK-EN-05

www.herder.nl