

Product Information: Crawler Excavator

R 945

Litronic®

Generation

8

Engine

295 HP / 220 kW

Tier 4 Final

Operating Weight

45,900 kg / 101,190 lb

Bucket Capacity

2.00 – 3.00 m³ / 2.62 – 3.92 yd³



LIEBHERR

Experience the Progress

R 945

Safety

- Panoramic visibility with no obstructions and camera on the rear and the right side for enhanced safety
- Tilttable console for easy and safe access to cab
- ROPS-certified cab structure
- Emergency exit via the rear cab window
- Right window and windshield in laminated and tinted glass

Equipment

- Large choice of types and lengths of equipment
- Safety check valves for hoist and stick cylinders (option)
- Guaranteed maintenance thanks to automatic centralised lubrication system

Maintenance

- Innovative servicing concept, with service points accessible from ground level
- Engine oil, hydraulic oil, fuel and urea (diesel exhaust fluid) levels visible on the display
- New concept for lateral access to uppercarriage and large maintenance platform





Comfort

- Spacious, air-conditioned work space
- Airsprung seat with vertical and longitudinal suspension
- Easy-to-use high resolution 7" colour touchscreen
- Completely retractable front cab window
- New LED lighting as standard

Engine

- New engine that conforms with the US EPA Tier 4 Final exhaust emissions standard
- Automatic engine idling / speed increase

Undercarriage

- Choice of a robust x-shaped undercarriage and a variable track undercarriage with integrated eyes for secure transport
- Easy maintenance
- Maintenance-free track chains and track rollers with lifetime lubrication

Technical Data



Engine

Rating	
per SAE J1349	295 HP (220 kW) at 1,800 rpm
per ISO 9249	299 HP (220 kW) at 1,800 rpm
Torque	1,421 Nm at 1,350 rpm / 1,048 lbf ft at 1,350 rpm
Model	Liebherr D944 A7-24
Type	4 cylinder in-line
Bore	130 mm / 5.1 in
Stroke	150 mm / 5.9 in
Displacement	8.0 l / 488 in³
Engine operation	4-stroke diesel Common-Rail Turbo-charged and after-cooler
Exhaust gas treatment	Tier 4 Final SCR Filter Passive regeneration by thermo management
Cooling system	Water-cooled and oil cooler, after-cooled and fuel cooled
Air cleaner	Dry-type air cleaner with pre-cleaner
Fuel tank	729 l / 193 gal
Urea tank	90 l / 24 gal
Electrical system	
Voltage	24 V
Batteries	2 x 135 Ah/ 12 V
Alternator	Three-phase current 28 V/ 140 A
Engine idling	Sensor controlled



Hydraulic Controls

Power distribution	Via control valves, simultaneous and independent actuation of undercarriage, swing drive and equipment
Electric servo circuit	Electro-hydraulic control
Equipment and swing	Proportional via joystick levers
Travel	– Proportional control via foot pedals or removable levers – Automatic or manual speed adjustment
Additional functions	Proportional regulation via foot pedals or mini-joystick



Hydraulic System

Hydraulic system	Positive Control hydraulic system. Demand-based, double independent pump flows Features high system dynamics and sensitivity provided by integrated system controlling Independent circuit for rotation
Hydraulic pumps	
For equipment and travel drive	Liebherr, variable displacement, swashplate double pump
Max. flow	2 x 315 l/min. / 2 x 83 gpm
Max. pressure	380 bar / 5,511 psi
For swing drive	Swashplate pump, closed-loop circuit
Max. flow	205 l/min. / 54 gpm
Max. pressure	400 bar / 5,802 psi
Pump management	Electronic management synchronous to the control block
Hydraulic tank	239 l / 63 gal
Hydraulic system	max. 475 l / max. 126 gal
Hydraulic oil filter	1 main return filter with integrated partial micro filtration (10 µm / 1,250 mesh)
Cooling system	Compact cooler, consisting of a water cooler, with hydraulic oil cooler, gearbox oil cooler, fuel cooler and after-cooler cores and hydrostatically driven fan
MODE selection	Adjustment of engine and hydraulic performance via a mode pre-selector to match application, e.g. for especially economical and environmentally friendly operation or for maximum digging performance and heavy-duty jobs
Engine speed and performance setting	Stepless adjustment of engine output and hydraulic power via engine speed



Swing Drive

Drive	Liebherr swashplate motor with integrated brake valve and torque control
Transmission	Liebherr compact planetary reduction gears
Swing ring	Liebherr, sealed race ball bearing swing ring, internal teeth
Swing speed	0 – 8.6 rpm stepless
Swing torque	117 kNm / 86,295 lbf ft
Holding brake	Wet multi-disc (spring applied, pressure released)



Operator's Cab

Cab	ROPS safety cab structure (roll-over protection system according to ISO 12117-2:2008) with windscreen, totally or partially retractable (only upper part), under cab roof, LED work headlights integrated in the ceiling, a door with a sliding window (can be opened on both sides), large storing box and several stowing possibilities, shock-absorbing suspension, laminated right hand side and roof windows, all windows tinted, separate extendible window shades for the sunroof window and windscreen, cigarette lighter and 24 V plug, 12 V plug, cup holder, mobile phone storage net
Operator's seat	Liebherr-Comfort seat, airsprung with automatic weight adjustment, vertical and longitudinal seat damping including consoles and joysticks. Seat and armrests adjustable separately and in combination (adjustable in width, height and inclination), seat heating as standard
Arm consoles	Oscillating consoles with seat, tiltable console left
Operation and displays	Large high-resolution operating unit, intuitive, color display with touchscreen, video-compatible, numerous setting, control and monitoring options, e.g. air conditioning control, fuel consumption, machine and attachment parameters
Air-conditioning	Automatic air-conditioning, recirculated air function, fast de-icing and demisting at the press of a button, air vents can be operated via a menu. Recirculated air and fresh air filters can be easily replaced and are accessible from the outside. Heating-cooling unit, designed for extreme outside temperatures, sensors for solar radiation, inside and outside temperatures
Noise emission	
ISO 6396	L_{pA} (inside cab) = 72 dB(A)
2000/14/EC	L_{WA} (surround noise) = 105 dB(A)



Undercarriage


Versions	
S-HD	Gauge 2,890 mm / 9'6"
LC-V	Gauge 2,390 mm / 2,890 mm / 7'10" / 9'6"
Drive	Liebherr swashplate motor with brake valves on both sides
Transmission	Liebherr planetary reduction gear
Maximum travel speed	Low range 2.9 km/h / 1.8 mph High range 4.6 km/h / 2.9 mph
Drawbar pull on crawler	363 kN / 81,610 lbf
Track components	D7G, maintenance-free
Track rollers/Carrier rollers	S-HD: 10/2 LC-V: 10/3
Tracks	Sealed and greased
Track pads	Triple grouser
Holding brake	Wet multi-disc (spring applied, pressure released)
Brake valves	Integrated into travel motor
Lashing eyes	Integrated



Equipment

Type	Combination of resistant steel plates and cast steel components
Hydraulic cylinders	Liebherr cylinders with seal and guidance systems
Bearings	Sealed, low maintenance
Lubrication	Liebherr central lubrication system
Hydraulic connections	Pipes and hoses equipped with SAE split-flange connections
Buckets	Standard equipped with Liebherr tooth system

Dimensions

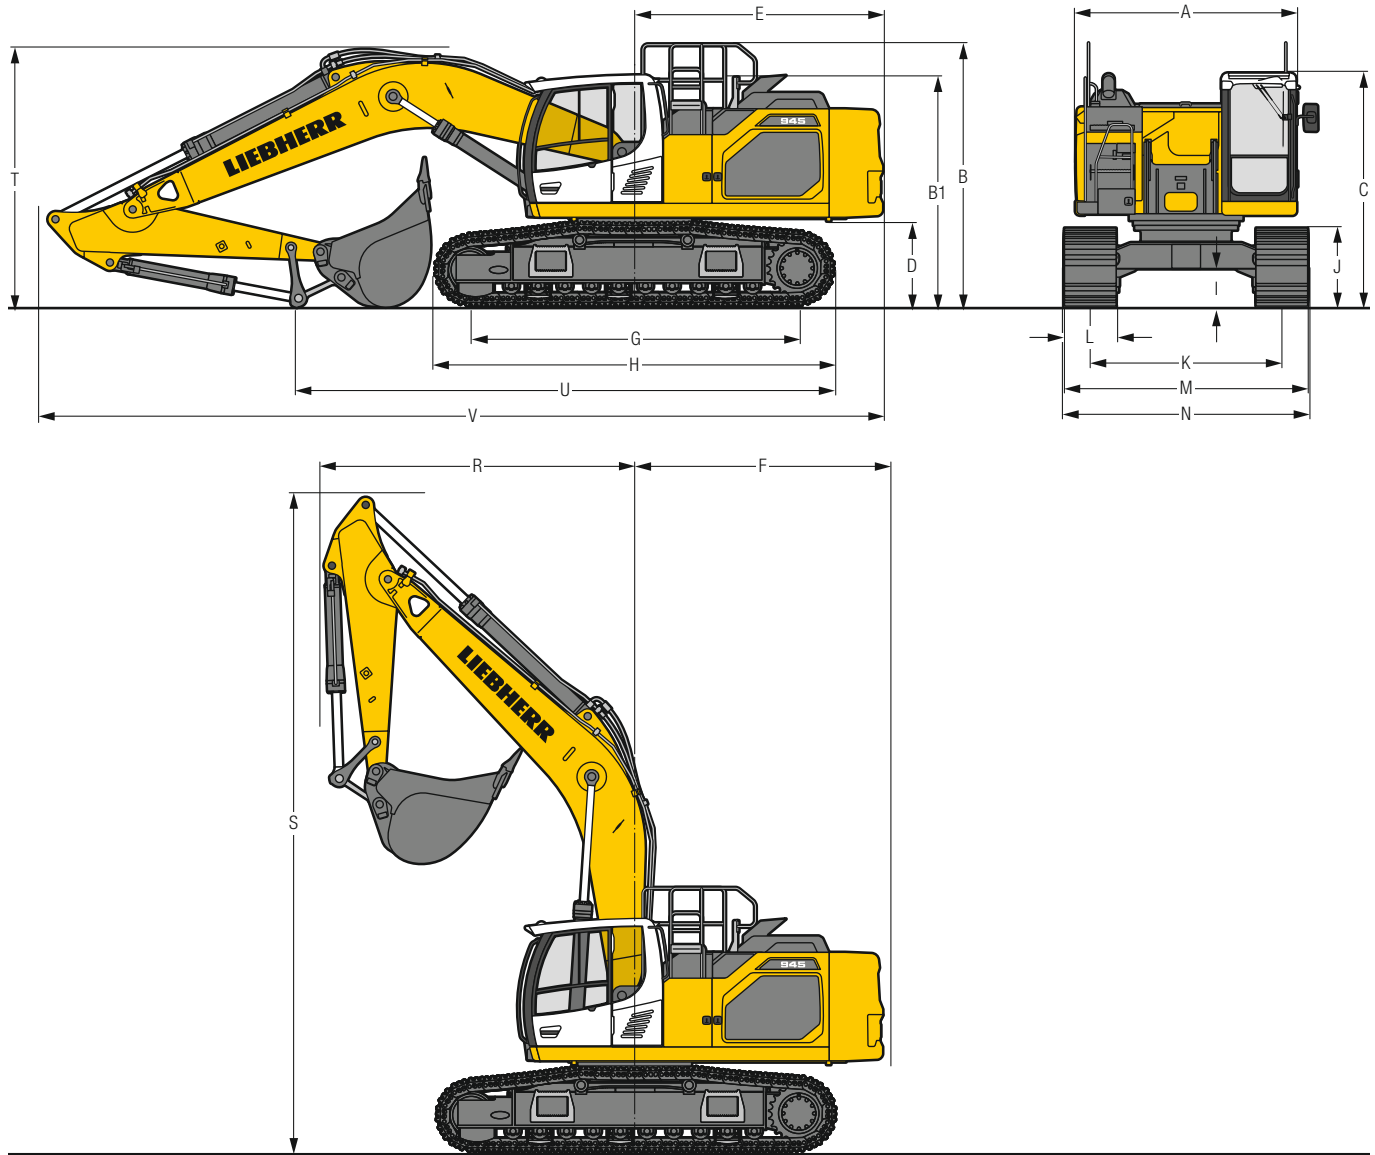

	S-HD	mm / ft in		LC-V	mm / ft in	
A Uppercarriage width		2,990** / 9'10"***			2,990** / 9'10"***	
B Uppercarriage height		3,635 / 11'11"			3,760 / 12' 4"	
B1 Uppercarriage height (handrails folded)		3,195 / 10' 6"			3,320 / 10'11"	
C Cab height		3,215 / 10' 7"			3,340 / 10'11"	
D Counterweight ground clearance		1,240 / 4' 1"			1,365 / 4' 6"	
E Rear-end length		3,350 / 11'			3,350 / 11'	
F Tail swing radius		3,450 / 11' 4"			3,450 / 11' 4"	
G Wheelbase		4,400 / 14' 5"			4,400 / 14' 5"	
H Undercarriage length		5,365 / 17' 7"			5,350 / 17' 7"	
I Undercarriage ground clearance		550 / 1'10"			740 / 2' 5"	
J Track height		1,145 / 3' 9"			1,185 / 3'11"	
K Track gauge		2,890 / 9' 6"			2,390 / 2,890 / 7'10" / 9' 6"	
L Track pad width	600 / 24"	750 / 30"	900 / 35"	600 / 24"	750 / 30"	900 / 35"
M Width over tracks	3,490 / 11' 5"	3,640 / 11'11"	3,790 / 12' 5"	2,990 / 3,490 / 9'10" / 11' 5"	3,140 / 3,640 / 10'4" / 11'11"	3,290 / 3,790 / 10'10" / 12' 5"
N Width over steps	3,695 / 12' 1"*	3,695 / 12' 1"*	3,845* / 12' 7"*	3,200 / 3,700* / 10' 6" / 12' 2"*	3,200 / 3,700* / 10'6" / 12' 2"*	3,350 / 3,850* / 11' / 12' 8"*

* width with removable steps

** without door stop device and spacer

		Stick length m/ft in	Mono boom 6.45 m/21'2" direct mounting		Mono boom SME 6.15 m/20'2" direct mounting	
			S-HD	LC-V	S-HD	LC-V
R	Front swing radius	2.60/ 8'6"		4,250/13'11"		
		2.90/ 9'6"		4,250/13'11"		
		3.25/10'8"		4,250/13'11"		
		3.95/13'		4,250/13'11"		
		2.15/ 7'1" SME			4,050/13'3"	
		2.60/ 8'6" SME			4,050/13'3"	
S	Height with boom up		8,950 /29'4"	9,050 /29' 8"	8,750/28'8"	8,850/29'
T	Boom height	2.60/ 8'6"	3,350 /11'	3,650 /12'	—	—
		2.90/ 9'6"	3,750 /12'4"	3,850 /12' 8"	—	—
		3.25/10'8"	3,800 /12'6"	3,900 /12'10"	—	—
		3.95/13'	3,400* /11'2"	3,450* /11' 4"	—	—
		2.15/ 7'1" SME	—	—	3,550/11' 8" / 3,350* /11"	3,600/11'10" / 3,400* /11'2"
		2.60/ 8'6" SME	—	—	3,900/12'10" / 3,350* /11"	3,950/13' / 3,450* /11'4"
U	Length on ground	2.60/ 8'6"	7,000 /23'	7,000 /23'	—	—
		2.90/ 9'6"	6,700 /22'	7,000 /23'	—	—
		3.25/10'8"	6,250 /20'6"	7,000 /23'	—	—
		3.95/13'	8,050* /26'5"	8,000* /26' 3"	—	—
		2.15/ 7'1" SME	—	—	7,050/23'2" / 9,550* /31' 4"	6,850/22'6" / 9,500* /31' 2"
		2.60/ 8'6" SME	—	—	6,850/22'6" / 9,100* /29'10"	6,850/22'6" / 9,100* /29'10"
V	Overall length	2.60/ 8'6"	11,200 /36'9"		—	—
		2.90/ 9'6"	11,200 /36'9"		—	—
		3.25/10'8"	11,200 /36'9"		—	—
		3.95/13'	11,000* /36'1"		—	—
		2.15/ 7'1" SME	—		10,900/35'9" / 10,800* /35'5"	
		2.60/ 8'6" SME	—		10,900/35'9" / 10,800* /35'5"	
	Bucket		2.15 m³/2.81 yd³		2.50 m³/3.27 yd³	

* without bucket

Transport Dimensions

removable elements disassembled

	Undercarriage/ Stick m/ft in	Mono boom 6.45 m/21'2"			Mono boom SME 6.15 m/20'2"		
		mm/ft in			mm/ft in		
Pad width		600/ 24"	750/ 30"	900/ 35"	600/ 24"	750/ 30"	900/ 35"
Transport width	S-HD	3,490/11' 5"	3,640/11'11"	3,790/12' 5"	3,490/11' 5"	3,640/11'11"	3,790/12' 5"
	LC-V	2,990/ 9'10"	3,140/10' 4"	3,290/10'10"	2,990/ 9'10"	3,140/10' 4"	3,290/10'10"
Transport length	S-HD	11,200/36'9" / 11,000* /36'1"			10,900/35'9" / 10,800* /35'5"		
	LC-V	11,200/36'9" / 11,000* /36'1"			10,900/35'9" / 10,800* /35'5"		
Transport height	2.60/ 8'6"	3,350 ¹⁾ /11'11" / 3,650 ²⁾ /12'2"			—		
	2.90/ 9'6"	3,750 ¹⁾ /12'4" ¹⁾ / 3,850 ²⁾ /12'8" ²⁾			—		
	3.25/10'8"	3,800 ¹⁾ /12'6" ¹⁾ / 3,900 ²⁾ /12'10" ²⁾			—		
	3.95/13'	3,400* ¹⁾ /11'2" ¹⁾ / 3,450* ²⁾ /11'4" ²⁾			—		
	2.15/ 7'1" SME	—			3,550 ¹⁾ /11' 8" ¹⁾ / 3,350* ¹⁾ /11'8" ¹⁾		
	2.60/ 8'6" SME	—			3,600 ²⁾ /11'10" ²⁾ / 3,400* ²⁾ /11'2" ²⁾		
		—			3,900 ¹⁾ /12'10" ¹⁾ / 3,350* ¹⁾ /11'8" ¹⁾		
		—			3,950 ²⁾ /13'2" ²⁾ / 3,450* ²⁾ /11'4" ²⁾		
Bucket		2.15 m³/2.81 yd³			2.50 m³/3.27 yd³		


* without bucket

¹⁾ with S-HD-Undercarriage

²⁾ with LC-V-Undercarriage

Backhoe Bucket

with Mono Boom 6.45 m/21'2" and Counterweight 8.4 t/18,520 lb

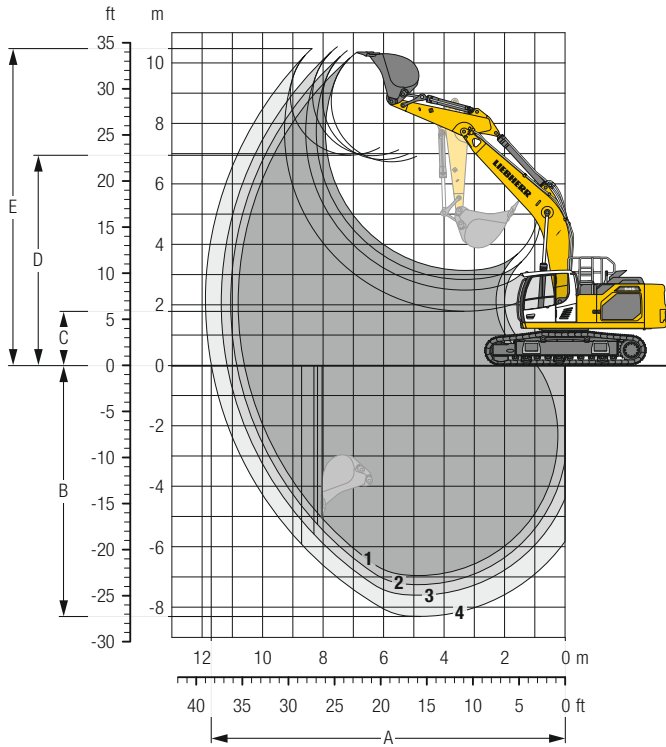

Digging Envelope

without quick coupler	1	2	3	4
Stick length	m/ft in 2.60/ 8' 6"	2.90/ 9'6"	3.25/10' 8"	3.95/13'
A Max. reach at ground level	m/ft in 10.60/34' 9"	10.85/35'7"	11.17/36' 8"	11.70/38' 5"
B Max. digging depth	m/ft in 6.95/22'10"	7.25/23'9"	7.60/24'11"	8.30/27' 3"
C Min. dumping height	m/ft in 3.14/10' 4"	2.84/ 9'4"	2.49/ 8' 2"	1.79/ 5'10"
D Max. dumping height	m/ft in 6.73/22' 1"	6.80/22'4"	6.93/22' 9"	6.95/22'10"
E Max. cutting height	m/ft in 10.35/33'11"	10.40/34'1"	10.53/34' 7"	10.47/34' 4"

Forces

without quick coupler	1	2	3	4
Stick digging force (ISO 6015)	kN/lbf 212/47,660	198/44,510	183/41,140	159/35,750
Bucket digging force (ISO 6015)	kN/lbf 238/53,510	238/53,510	238/53,510	238/53,510
Stick digging force (SAE J1179)	kN/lbf 202/45,410	189/42,490	176/39,570	154/34,620
Bucket digging force (SAE J1179)	kN/lbf 210/47,210	210/47,210	210/47,210	210/47,210

Operating Weight and Ground Pressure

The operating weight includes the basic machine with counterweight 8.4 t/18,520 lb, mono boom 6.45 m/21'2", stick 3.25 m/10'8" and bucket 2.15 m³/2.81 yd³ (1,730 kg/3,810 lb).

Undercarriage	S-HD		
Pad width	mm/in 600/24"	750/30"	900/35"
Weight	kg/lb 41,200/90,830	42,450/93,590	43,300/95,460
Ground pressure	kg/cm²/psi 0.72/10.2	0.59/8.4	0.51/7.3

Undercarriage	LC-V		
Pad width	mm/in 600/24"	750/30"	900/35"
Weight	kg/lb 43,600/96,120	44,850/98,880	45,700/100,750
Ground pressure	kg/cm²/psi 0.77/11.0	0.64/9.1	0.54/7.7

Optional: counterweight 9.4 t/20,720 lb

(counterweight 9.4 t/20,720 lb increases the operating weight by 1,000 kg/2,210 lb and ground pressure by 0.02 kg/cm²/0.3 psi) see load tables on page 14 and 15

Buckets Machine stability per ISO 10567* (75% of tipping capacity)

	Cutting width	Capacity ISO 7451	Weight ⁽²⁾	Weight ⁽⁴⁾	S-HD-Undercarriage (with track pads 750 mm/30")								LC-V-Undercarriage (with track pads 750 mm/30")								
					Stick length (m/ft in)								Stick length (m/ft in)								
					without quick coupler				with quick coupler				without quick coupler				with quick coupler				
					2.60 8'6"	2.90 9'6"	3.25 10'8"	3.95 13'	2.60 8'6"	2.90 9'6"	3.25 10'8"	3.95 13'	2.60 8'6"	2.90 9'6"	3.25 10'8"	3.95 13'	2.60 8'6"	2.90 9'6"	3.25 10'8"	3.95 13'	
with counterweight 8.4 t/18,520 lb																					
STD ⁽¹⁾	1,650	2.00	1,730	1,690																	
	65"	2.62	3,810	3,730	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲		
	1,600	2.15	1,770	1,730	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲		
	63"	2.81	3,900	3,810	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲		
	1,650	2.25	1,810	1,770	▲	▲	▲	■	▲	▲	▲	■	▲	▲	▲	▲	▲	▲	▲		
	65"	2.94	3,990	3,900	▲	▲	▲	■	▲	▲	▲	■	▲	▲	▲	▲	▲	▲	▲		
	1,800	2.50	1,900	1,860	▲	▲	■	▲	▲	▲	■	▲	▲	■	▲	▲	▲	▲	■		
	71"	3.27	4,190	4,100	▲	■	▲	■	▲	■	▲	■	▲	▲	▲	▲	▲	■	▲		
HD ⁽²⁾	1,800	2.75	1,970	1,930	▲	■	▲	■	▲	■	▲	■	▲	▲	▲	▲	▲	■	▲		
	71"	3.60	4,340	4,260	▲	■	▲	■	▲	■	▲	■	▲	▲	▲	▲	▲	■	■		
	1,850	3.00	2,020	1,980	■	▲	■	△	■	▲	■	△	▲	■	■	■	▲	■	■		
	73"	3.92	4,450	4,370	■	▲	■	△	■	▲	■	△	▲	■	■	■	▲	■	■		
	with counterweight 9.4 t/20,720 lb																				
	1,650	2.00	1,730	1,690	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲		
	65"	2.62	3,810	3,730	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲		
	1,600	2.15	1,770	1,730	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲		
63"	2.81	3,900	3,810	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲			
STD ⁽¹⁾	1,650	2.25	1,810	1,770	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲		
	65"	2.94	3,990	3,900	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲		
	1,800	2.50	1,900	1,860	▲	▲	▲	■	▲	▲	▲	■	▲	▲	▲	▲	▲	▲	▲		
	71"	3.27	4,190	4,100	▲	▲	▲	■	▲	▲	▲	■	▲	▲	▲	▲	▲	▲	▲		
	1,800	2.75	1,970	1,930	▲	▲	■	▲	▲	▲	■	▲	▲	▲	■	▲	▲	▲	■		
	71"	3.60	4,340	4,260	▲	▲	■	▲	▲	▲	■	▲	▲	▲	■	▲	▲	▲	■		
	1,850	3.00	2,020	1,980	▲	■	▲	■	▲	■	▲	■	▲	▲	■	▲	▲	■	▲		
	73"	3.92	4,450	4,370	▲	■	▲	■	▲	■	▲	■	▲	▲	■	▲	▲	■	▲		
HD ⁽²⁾	1,650	2.00	1,830	1,790	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲		
	65"	2.62	4,030	3,950	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲		
	1,600	2.15	1,870	1,830	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲		
	63"	2.81	4,120	4,030	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲		
	1,650	2.25	1,910	1,870	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲		
	65"	2.94	4,210	4,120	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲		
	1,800	2.50	2,000	1,960	▲	▲	▲	■	▲	▲	▲	■	▲	▲	▲	▲	▲	▲	■		
	71"	3.27	4,410	4,320	▲	▲	▲	■	▲	▲	▲	■	▲	▲	▲	▲	▲	▲	■		
HD ⁽²⁾	1,800	2.75	2,080	2,040	▲	▲	■	▲	▲	▲	■	▲	▲	▲	■	▲	▲	▲	■		
	71"	3.60	4,590	4,500	▲	▲	■	▲	▲	▲	■	▲	▲	▲	■	▲	▲	▲	■		
	1,850	3.00	2,130	2,090	▲	■	▲	■	■	■	▲	■	▲	▲	■	▲	▲	■	■		
73"	3.92	4,700	4,610	▲	▲	▲	■	■	■	▲	■	▲	▲	■	▲	▲	■	■			

* Indicated loads are based on ISO 10567, at maximum reach, and may be swung 360° on firm and even ground

⁽¹⁾ Standard bucket with teeth Z 50

⁽²⁾ HD bucket with teeth Z 50

⁽³⁾ Bucket for direct mounting


⁽⁴⁾ Bucket for mounting to quick coupler

Other buckets available upon request

Max. material weight ▲ = ≤ 2.0 t/m³/3,400 lb/yd³, ■ = ≤ 1.8 t/m³/3,000 lb/yd³, ▲ = ≤ 1.65 t/m³/2,800 lb/yd³, ■ = ≤ 1.5 t/m³/2,500 lb/yd³, △ = ≤ 1.2 t/m³/2,000 lb/yd³

Backhoe Bucket

with Mono Boom SME 6.15 m/20'2" and Counterweight 8.4 t/18,520 lb

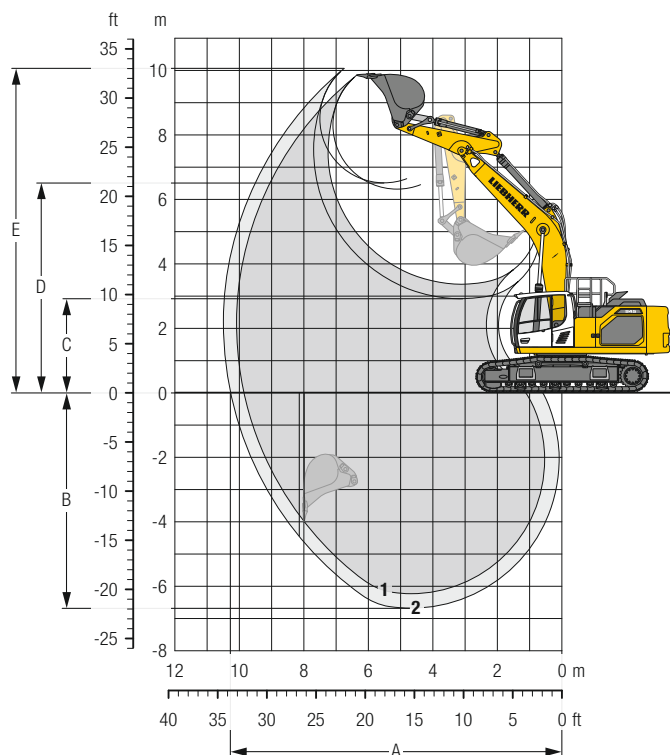

Digging Envelope

without quick coupler		1	2
Stick length	m/ft in	2.15/ 7'1" SME	2.60/ 8' 6" SME
A Max. reach at ground level	m/ft in	9.86/ 32'4"	10.28/ 33' 9"
B Max. digging depth	m/ft in	6.23/ 20'5"	6.68/ 21'11"
C Min. dumping height	m/ft in	3.37/ 11'1"	2.92/ 9' 7"
D Max. dumping height	m/ft in	6.32/ 20'9"	6.61/ 21' 8"
E Max. cutting height	m/ft in	9.86/ 32'4"	10.06/ 33'

Forces

without quick coupler		1	2
Stick digging force (ISO 6015)	kN/lbf	238/ 53,510	212/ 47,660
Bucket digging force (ISO 6015)	kN/lbf	264/ 59,350	264/ 59,350
Stick digging force (SAE J1179)	kN/lbf	226/ 50,810	202/ 45,410
Bucket digging force (SAE J1179)	kN/lbf	233/ 52,380	233/ 52,380

Operating Weight and Ground Pressure

The operating weight includes the basic machine with counterweight 8.4 t/18,520 lb, mono boom SME 6.15 m/20'2", stick SME 2.15 m/7'1" and bucket HD 2.50 m³/3.27 yd³ (2,000 kg/4,410 lb).

Undercarriage		S-HD	
Pad width	mm/in	600/ 24"	750/ 30"
Weight	kg/lb	41,400/ 91,270	42,650/ 94,030
Ground pressure	kg/cm²/psi	0.73/ 10.4	0.60/ 8.5

Undercarriage		LC-V	
Pad width	mm/in	600/ 24"	750/ 30"
Weight	kg/lb	43,800/ 96,560	45,050/ 99,320
Ground pressure	kg/cm²/psi	0.77/ 11.0	0.64/ 9.1

Optional: counterweight 9.4 t/20,720 lb

(counterweight 9.4 t/20,720 lb increases the operating weight by 1,000 kg/2,210 lb and ground pressure by 0.02 kg/cm²/0.3 psi) see load tables on page 17

Buckets Machine stability per ISO 10567* (75 % of tipping capacity)

	Cutting width mm in	Capacity ISO 7451 m³ yd³	Weight ⁽²⁾ kg lb	Weight ⁽⁴⁾ kg lb	S-HD-Undercarriage (with track pads 750 mm/30")				LC-V-Undercarriage (with track pads 750 mm/30")				
					Stick length (m/ft in)				Stick length (m/ft in)				
					without quick coupler		with quick coupler		without quick coupler		with quick coupler		
					2.15 7'1"	2.60 8'6"	2.15 7'1"	2.60 8'6"	2.15 7'1"	2.60 8'6"	2.15 7'1"	2.60 8'6"	
					with counterweight 8.4 t/18,520 lb								
HD ⁽¹⁾	1,600 63"	2.15 2.81	1,870 4,120	1,830 4,030	▲	▲	▲	▲	▲	▲	▲	▲	
	1,650 65"	2.25 2.94	1,910 4,210	1,870 4,120	▲	▲	▲	▲	▲	▲	▲	▲	
	1,800 71"	2.50 3.27	2,000 4,410	1,960 4,320	▲	▲	▲	▲	▲	▲	▲	▲	
	1,800 71"	2.75 3.60	2,080 4,590	2,040 4,500	▲	▲	▲	▲	▲	▲	▲	▲	
	1,850 73"	3.00 3.92	2,130 4,700	2,090 4,610	▲	■	▲	■	▲	▲	▲	▲	
	1,650 65"	2.00 2.62	2,490 5,490	2,530 5,580	▲	▲	▲	▲	▲	▲	▲	▲	
HDR ⁽²⁾	1,650 65"	2.25 2.94	2,570 5,670	2,610 5,750	▲	▲	▲	▲	▲	▲	▲	▲	
	1,650 65"	2.50 3.27	2,660 5,860	2,700 5,950	▲	▲	▲	▲	▲	▲	▲	▲	
	with counterweight 9.4 t/20,720 lb												
	1,600 63"	2.15 2.81	1,870 4,120	1,830 4,030	▲	▲	▲	▲	▲	▲	▲	▲	
HD ⁽¹⁾	1,650 65"	2.25 2.94	1,910 4,210	1,870 4,120	▲	▲	▲	▲	▲	▲	▲	▲	
	1,800 71"	2.50 3.27	2,000 4,410	1,960 4,320	▲	▲	▲	▲	▲	▲	▲	▲	
	1,800 71"	2.75 3.60	2,080 4,590	2,040 4,500	▲	▲	▲	▲	▲	▲	▲	▲	
	1,850 73"	3.00 3.92	2,130 4,700	2,090 4,610	▲	▲	▲	▲	▲	▲	▲	▲	
	1,650 65"	2.00 2.62	2,490 5,490	2,530 5,580	▲	▲	▲	▲	▲	▲	▲	▲	
	1,650 65"	2.25 2.94	2,570 5,670	2,610 5,750	▲	▲	▲	▲	▲	▲	▲	▲	
HDR ⁽²⁾	1,650 65"	2.50 3.27	2,660 5,860	2,700 5,950	▲	▲	▲	▲	▲	▲	▲	▲	

* Indicated loads are based on ISO 10567, at maximum reach, and may be swung 360° on firm and even ground

⁽¹⁾ HD bucket with teeth Z 50

⁽²⁾ HDR bucket with teeth Z 70

⁽³⁾ Bucket for direct mounting

⁽⁴⁾ Bucket for mounting to quick coupler

Other buckets available upon request

Max. material weight ▲ = ≤ 2.0 t/m³/3,400 lb/yd³, ■ = ≤ 1.8 t/m³/3,000 lb/yd³

Lift Capacities

with Mono Boom 6.45 m/21'2", Counterweight 8.4 t/18,520 lb and Track Pads 750 mm/30"

Stick 2.60 m/8'6"

Under-carriage	3.0 m 10 ft	4.5 m 15 ft	6.0 m 20 ft	7.5 m 25 ft	9.0 m 30 ft	Max. reach
9.0 m t						9.8*
30 ft lb						9.8*
7.5 m t			10.0*	10.0		7.1
25 ft lb			22.0*	22.0*		21.8*
6.0 m t			10.6*	10.6*		8.3
20 ft lb			23.1*	23.1*		21.2*
4.5 m t		15.4*	15.4*	11.9*	8.8	7.3
15 ft lb		33.0*	33.0*	25.7*	19.1	16.2
3.0 m t		17.6	18.5*	11.7	13.3*	6.8
10 ft lb		38.1	39.8*	25.3	28.8*	15.1
1.5 m t		16.6*	16.6*	11.2	14.3*	6.7
5 ft lb		36.4	40.3*	24.2	31.1*	14.7
0 m t		16.7	19.6*	11.0	14.7*	6.9
0 ft lb		35.9	42.6*	23.7	31.8*	15.1
-1.5 m t	15.4*	15.4*	16.8	18.3*	10.9	7.5
-5 ft lb	35.0*	35.0*	36.0	39.8*	23.6	16.5
-3.0 m t	20.0*	20.0*	16.0*	16.0*	11.1	8.9
-10 ft lb	43.5*	43.5*	34.7*	34.7*	23.9	19.7
-4.5 m t		11.9*	11.9*			9.4*
-15 ft lb		25.4*	25.4*			20.5*
-6.0 m t						
-20 ft lb						

Stick 2.90 m/9'6"

Under-carriage	3.0 m 10 ft	4.5 m 15 ft	6.0 m 20 ft	7.5 m 25 ft	9.0 m 30 ft	Max. reach
9.0 m t						9.3*
30 ft lb						9.3*
7.5 m t						7.4
25 ft lb						20.5*
6.0 m t			10.2*	10.2*		8.3
20 ft lb			22.2*	22.2*		20.5*
4.5 m t		14.6*	14.6*	11.5*	8.9	7.0
15 ft lb		31.5*	31.5*	24.9*	19.1	15.5
3.0 m t		17.8	17.8*	11.8	13.0*	6.5
10 ft lb		38.4*	38.4*	25.4	28.0*	14.4
1.5 m t		16.9	19.6*	11.2	14.1*	6.4
5 ft lb		36.5	42.4*	24.3	30.6*	14.1
0 m t		16.6	19.7*	10.9	14.6*	6.5
0 ft lb		35.8	42.8*	23.6	31.6*	14.5
-1.5 m t	15.4*	15.4*	16.6	18.7*	10.9	7.1
-5 ft lb	34.8*	34.8*	35.8	40.6*	23.4	15.6
-3.0 m t	21.5*	21.5*	16.6*	16.6*	11.0	8.3
-10 ft lb	46.7*	46.7*	36.0*	36.0*	23.6	18.4
-4.5 m t		16.2*	13.0*	13.0*	9.6*	9.5*
-15 ft lb		34.8*	27.7*	27.7*		20.8*
-6.0 m t						
-20 ft lb						

Height Can be slewed through 360° In longitudinal position of undercarriage Max. reach * Limited by hydr. capacity

The load values are quoted in tons (t) / lb x 1,000 at stick end (without bucket), and may be swung 360° on firm and even ground. Adjacent values are valid for the undercarriage when in the longitudinal position. Capacities are valid for 750 mm/30" wide track pads. Indicated loads are based on ISO 10567 standard and do not exceed 75% of tipping or 87% of hydraulic capacity (indicated via *). Without bucket cylinder, link and lever the lift capacities will increase by 495 kg/1,090 lb. Lifting capacity of the excavator is limited by machine stability and hydraulic capacity.

Stick 3.25 m / 10'8"

Under-carriage		3.0 m 10 ft		4.5 m 15 ft		6.0 m 20 ft		7.5 m 25 ft		9.0 m 30 ft		 m ft in		
														
S-HD	9.0 m	t												
	30 ft	lb												6.5
	7.5 m	t							8.8*	8.8*			8.1*	7.8
	25 ft	lb											18.0*	25'2"
	6.0 m	t							8.9*	8.9*			7.4	8.6
	20 ft	lb							19.5*	19.5*			16.5	28'1"
	4.5 m	t	20.8*	20.8*	13.7*	13.7*	10.9*	10.9*	8.9	9.5*	6.7	8.7*	6.6	9.1
	15 ft	lb			29.5*	29.5*	23.7*	23.7*	19.2	20.7*			14.6	29'10"
	3.0 m	t			17.0*	17.0*	11.8	12.5*	8.5	10.3*	6.5	9.0*	6.2	9.4
	10 ft	lb			36.6*	36.6*	25.5	27.0*	18.4	22.3*	14.1	19.7*	13.6	30'8"
	1.5 m	t			17.0	19.2*	11.2	13.8*	8.2	11.0*	6.4	9.3*	6.0	9.3
	5 ft	lb			36.6	41.4*	24.2	29.8*	17.8	23.8*	13.8	20.2*	13.3	30'8"
	0 m	t	7.5*	7.5*	16.5	19.7*	10.9	14.4*	8.0	11.4*	6.3	9.4*	6.2	9.1
	0 ft	lb	17.4*	17.4*	35.6	42.6*	23.5	31.2*	17.3	24.6*			13.6	29'10"
	-1.5 m	t	14.8*	14.8*	16.5	18.9*	10.7	14.3*	7.9	11.2*			6.6	9.4*
	-5 ft	lb	33.5*	33.5*	35.4	41.1*	23.1	30.9*	17.1	24.2*			14.6	28'
-3.0 m	t	22.9*	22.9*	16.6	17.2*	10.8	13.2*	8.0	10.1*			7.6	9.6*	
-10 ft	lb	49.8*	49.8*	35.7	37.2*	23.3	28.5*	17.3	21.7*			16.9	21.1*	
-4.5 m	t	18.0*	18.0*	13.9*	13.9*	10.6	10.6*					9.4*	9.4*	
-15 ft	lb	38.7*	38.7*	29.9*	29.9*	22.4*	22.4*					20.6*	20.6*	
-6.0 m	t													
-20 ft	lb													
LC-V	9.0 m	t											8.6*	6.5
	30 ft	lb											8.6*	
	7.5 m	t							8.7*	8.7*			8.1*	7.8
	25 ft	lb							18.6*	18.6*			17.9*	25'2"
	6.0 m	t					9.7*	9.7*	8.9*	8.9*			7.7	8.6
	20 ft	lb					21.2*	21.2*	19.5*	19.5*			17.1	28'1"
	4.5 m	t	21.7*	21.7*	14.0*	14.0*	11.1*	11.1*	9.3	9.6*	7.1	8.7*	6.9	9.1
	15 ft	lb	45.9*	45.9*	30.1*	30.1*	24.0*	24.0*	20.1	20.8*			15.3	29'10"
	3.0 m	t			17.2*	17.2*	12.4	12.6*	9.0	10.3*	6.9	9.0*	6.5	9.4
	10 ft	lb			37.1*	37.1*	26.7	27.3*	19.4	22.5*	14.9	19.7*	14.4	30'8"
	1.5 m	t			17.9	19.3*	11.8	13.8*	8.7	11.0*	6.7	9.3*	6.4	9.3
	5 ft	lb			38.5	41.6*	25.5	30.0*	18.7	23.9*	14.5	20.3*	14.1	30'8"
	0 m	t	8.2*	8.2*	17.5	19.6*	11.5	14.4*	8.5	11.4*	6.6	9.3*	6.6	9.2*
	0 ft	lb	18.8*	18.8*	37.6	42.6*	24.8	31.3*	18.3	24.7*			14.5	29'10"
	-1.5 m	t	15.5*	15.5*	17.4	18.8*	11.4	14.2*	8.4	11.2*			7.1	9.4*
	-5 ft	lb	34.9*	34.9*	37.4	40.9*	24.5	30.8*	18.1	24.1*			15.6	20.8*
-3.0 m	t	22.6*	22.6*	17.0*	17.0*	11.4	13.0*	8.5	10.0*			8.2	9.6*	
-10 ft	lb	49.1*	49.1*	36.7*	36.7*	24.7	28.1*	18.3	21.3*			18.2	21.1*	
-4.5 m	t	17.5*	17.5*	13.6*	13.6*	10.2*	10.2*					9.3*	9.3*	
-15 ft	lb	37.5*	37.5*	29.1*	29.1*	21.6*	21.6*					20.5*	20.5*	
-6.0 m	t													
-20 ft	lb													

Stick 3.95 m / 13'

Under-carriage		3.0 m 10 ft		4.5 m 15 ft		6.0 m 20 ft		7.5 m 25 ft		9.0 m 30 ft				
														m ft in
S-HD	9.0 m t											6.7*	6.7*	7.2
	30 ft lb													
	7.5 m t							7.7*	7.7*			6.4*	6.4*	8.4
	25 ft lb							17.0*	17.0*			14.1*	14.1*	27'4"
	6.0 m t							8.0*	8.0*	6.8*	6.8*	6.3*	6.3*	9.2
	20 ft lb							17.5*	17.5*			13.9*	13.9*	29'11"
	4.5 m t					9.8*	9.8*	8.7*	8.7*	6.7	8.0*	6.0	6.5*	9.6
	15 ft lb					21.3*	21.3*	18.9*	18.9*	14.4	17.5*	13.3	14.2*	31'7"
	3.0 m t	13.0*	13.0*	15.3*	15.3*	11.5*	11.5*	8.6	9.6*	6.5	8.5*	5.6	6.8*	9.9
	10 ft lb	33.1*	33.1*	32.9*	32.9*	24.9*	24.9*	18.5	20.8*	14.0	18.4*	12.4	14.9*	32'5"
	1.5 m t	7.1*	7.1*	17.2	18.0*	11.3	13.0*	8.2	10.4*	6.3	8.9*	5.5	7.3*	9.9
	5 ft lb	16.6*	16.6*	37.0	38.9*	24.3	28.2*	17.7	22.6*	13.6	19.3*	12.1	16.2*	32'5"
0 m t	10.0*	10.0*	16.5	19.3*	10.8	14.0*	7.9	11.0*	6.1	9.1*	5.6	8.3*	9.6	
0 ft lb	22.8*	22.8*	35.4	41.8*	23.3	30.3*	17.1	23.9*	13.2	19.8*	12.3	18.2*	31'7"	
LC-V	-1.5 m t	14.7*	14.7*	16.2	19.2*	10.6	14.2*	7.8	11.1*	6.1	9.0*	5.9	8.8*	9.1
	-5 ft lb	33.1*	33.1*	34.9	41.7*	22.8	30.8*	16.7	24.1*	13.1	19.5*	13.1	19.4*	29'11"
	-3.0 m t	20.6*	20.6*	16.3	18.0*	10.5	13.6*	7.7	10.6*			6.7	9.1*	8.3
	-10 ft lb	46.6*	46.6*	35.0	39.0*	22.7	29.4*	16.7	22.9*			14.8	20.0*	27'2"
	-4.5 m t	21.2*	21.2*	15.6*	15.6*	10.7	11.8*					8.3	9.3*	7.1
	-15 ft lb	45.7*	45.7*	33.5*	33.5*	23.1	25.4*					18.5	20.4*	23'2"
	-6.0 m t			11.0*	11.0*							8.9*	8.9*	5.2
	-20 ft lb			22.9*	22.9*							19.5*	19.5*	16'8"
	9.0 m t											6.7*	6.7*	7.2
	30 ft lb													
	7.5 m t							7.7*	7.7*			6.4*	6.4*	8.4
	25 ft lb							17.0*	17.0*			14.1*	14.1*	27'4"
6.0 m t							8.1*	8.1*	7.0*	7.0*	6.3*	6.3*	9.2	
20 ft lb							17.6*	17.6*			13.9*	13.9*	29'11"	
4.5 m t					10.0*	10.0*	8.8*	8.8*	7.1	8.1*	6.3	6.5*	9.6	
15 ft lb					21.6*	21.6*	19.1*	19.1*	15.2	17.6*	14.0	14.2*	31'7"	
3.0 m t	11.4*	11.4*	15.6*	15.6*	11.6*	11.6*	9.0	9.7*	6.9	8.5*	5.9	6.8*	9.9	
10 ft lb	28.7*	28.7*	33.5*	33.5*	25.2*	25.2*	19.4	21.0*	14.8	18.5*	13.1	15.0*	32'5"	
1.5 m t	7.2*	7.2*	18.0	18.2*	11.9	13.1*	8.6	10.5*	6.7	8.9*	5.8	7.4*	9.9	
5 ft lb	16.8*	16.8*	38.9	39.3*	25.6	28.4*	18.6	22.8*	14.4	19.4*	12.8	16.3*	32'5"	
0 m t	10.4*	10.4*	17.4	19.3*	11.4	14.0*	8.4	11.0*	6.5	9.2*	5.9	8.4*	9.6	
0 ft lb	23.5*	23.5*	37.4	41.9*	24.6	30.4*	18.1	23.9*	14.0	19.9*	13.1	18.4*	31'7"	
-1.5 m t	15.1*	15.1*	17.2	19.2*	11.2	14.2*	8.2	11.1*	6.4	9.0*	6.3	8.8*	9.1	
-5 ft lb	34.1*	34.1*	36.9	41.5*	24.1	30.7*	17.7	24.1*			14.0	19.4*	29'11"	
-3.0 m t	21.2*	21.2*	17.2	17.9*	11.2	13.5*	8.2	10.5*			7.2	9.1*	8.3	
-10 ft lb	47.9*	47.9*	37.0	38.7*	24.1	29.2*	17.7	22.6*			15.9	20.1*	27'2"	
-4.5 m t	20.7*	20.7*	15.3*	15.3*	11.4	11.6*					9.0	9.3*	7.1	
-15 ft lb	44.7*	44.7*	32.9*	32.9*	24.5	24.8*					20.1	20.4*	23'2"	
-6.0 m t			10.4*	10.4*							8.8*	8.8*	5.2	
-20 ft lb			21.6*	21.6*							19.2*	19.2*	16'8"	

 Height
  Can be slewed through 360°
  In longitudinal position of undercarriage
  Max. reach
 * Limited by hydr. capacity

The load values are quoted in tons (t) / lb x 1,000 at stick end (without bucket), and may be swung 360° on firm and even ground. Adjacent values are valid for the undercarriage when in the longitudinal position. Capacities are valid for 750 mm / 30" wide track pads. Indicated loads are based on ISO 10567 standard and do not exceed 75% of tipping or 87% of hydraulic capacity (indicated via *). Without bucket cylinder, link and lever the lift capacities will increase by 495 kg / 1,090 lb. Lifting capacity of the excavator is limited by machine stability and hydraulic capacity.

Lift Capacities

with Mono Boom 6.45 m/21'2", Counterweight 9.4 t/20,720 lb and Track Pads 750 mm/30"

Stick 2.60 m/8'6"

Under-carriage	3.0 m 10 ft	4.5 m 15 ft	6.0 m 20 ft	7.5 m 25 ft	9.0 m 30 ft	Max. reach
9.0 m t						
30 ft lb						
7.5 m t			10.0*	10.0*		9.8* 9.8* 7.1
25 ft lb			22.0*	22.0*		21.8* 21.8* 22'11"
6.0 m t			10.6*	10.6*	9.6	8.8 9.6* 8.0
20 ft lb			23.1*	23.1*	20.8	19.7 21.2* 26'
4.5 m t		15.4*	15.4*	11.9*	9.4	7.8 9.6* 8.5
15 ft lb		33.0*	33.0*	25.7*	20.3	17.3 21.1* 27'11"
3.0 m t		18.5*	18.5*	12.5	13.3*	7.3 9.7* 8.8
10 ft lb		39.8*	39.8*	26.9	28.8*	16.1 21.3* 28'10"
1.5 m t		16.6*	16.6*	12.0	14.3*	7.1 9.8* 8.8
5 ft lb		38.8	40.3*	25.9	31.1*	15.7 21.6* 28'10"
0 m t		17.8	19.6*	11.7	14.7*	7.3 10.0* 8.5
0 ft lb		38.4	42.6*	25.3	31.8*	16.2 22.0* 27'11"
-1.5 m t	15.4*	15.4*	17.9	18.3*	11.7	8.0 10.1* 7.9
-5 ft lb	35.0*	35.0*	38.5	39.8*	25.2	17.7 22.3* 26'
-3.0 m t	20.0*	20.0*	16.0*	16.0*	11.8	9.5 10.1* 7.0
-10 ft lb	43.5*	43.5*	34.7*	34.7*	25.5	21.0 22.3* 27'11"
-4.5 m t		11.9*	11.9*			9.4* 9.4* 5.5
-15 ft lb		25.4*	25.4*			20.5* 20.5* 17'10"
-6.0 m t						
-20 ft lb						

Stick 2.90 m/9'6"

Under-carriage	3.0 m 10 ft	4.5 m 15 ft	6.0 m 20 ft	7.5 m 25 ft	9.0 m 30 ft	Max. reach
9.0 m t						
30 ft lb						
7.5 m t						9.3* 9.3* 7.4
25 ft lb						20.5* 20.5* 23'11"
6.0 m t			10.2*	10.2*	9.3*	8.4 9.1* 8.3
20 ft lb			22.2*	22.2*	20.5*	18.7 20.0* 26'11"
4.5 m t		14.6*	14.6*	11.5*	9.4	7.5 9.2* 8.8
15 ft lb		31.5*	31.5*	24.9*	20.4	16.5 20.2* 28'10"
3.0 m t		17.8*	17.8*	12.5	13.0*	7.0 9.3* 9.0
10 ft lb		38.4*	38.4*	27.0	28.0*	15.4 20.4* 29'7"
1.5 m t		18.1	19.6*	12.0	14.1*	6.8 9.4* 9.0
5 ft lb		39.0	42.4*	25.9	30.6*	15.1 20.8* 29'7"
0 m t		17.8	19.7*	11.7	14.6*	7.0 9.7* 8.8
0 ft lb		38.3	42.8*	25.3	31.6*	15.5 21.3* 28'10"
-1.5 m t	15.4*	15.4*	17.8	18.7*	11.6	7.6 9.8* 8.2
-5 ft lb	34.8*	34.8*	38.2	40.6*	25.0	16.8 21.7* 26'11"
-3.0 m t	21.5*	21.5*	16.6*	16.6*	11.7	8.9 9.9* 7.3
-10 ft lb	46.7*	46.7*	36.0*	36.0*	25.3	19.7 21.8* 23'11"
-4.5 m t		16.2*	16.2*	13.0*	13.0*	9.5* 9.5* 5.9
-15 ft lb		34.8*	34.8*	27.7*	27.7*	20.8* 20.8* 19'1"
-6.0 m t						
-20 ft lb						

Height
 Can be slewed through 360°
 In longitudinal position of undercarriage
 Max. reach
 * Limited by hydr. capacity

The load values are quoted in tons (t) / lb x 1,000 at stick end (without bucket), and may be swung 360° on firm and even ground. Adjacent values are valid for the undercarriage when in the longitudinal position. Capacities are valid for 750 mm/30" wide track pads. Indicated loads are based on ISO 10567 standard and do not exceed 75% of tipping or 87% of hydraulic capacity (indicated via *). Without bucket cylinder, link and lever the lift capacities will increase by 495 kg/1,090 lb. Lifting capacity of the excavator is limited by machine stability and hydraulic capacity.

Stick 3.25 m / 10'8"

Under-carriage		3.0 m 10 ft		4.5 m 15 ft		6.0 m 20 ft		7.5 m 25 ft		9.0 m 30 ft		m ft in
S-HD	9.0 m t											6.5
	30 ft lb											
	7.5 m t							8.8*	8.8*			8.1*
	25 ft lb							18,0*	18,0*			25'2"
	6.0 m t							8.9*	8.9*			7.9
	20 ft lb							19,5*	19,5*			28'1"
	4.5 m t	20.8*	20.8*	13.7*	13.7*	10.9*	10.9*	9.5	9.5*	7.1	8.7*	7.0
	15 ft lb			29,5*	29,5*	23,7*	23,7*	20,4	20,7*			15,6
	3.0 m t			17.0*	17.0*	12.5*	12.5*	9.1	10.3*	7.0	9.0*	6.6
	10 ft lb			36,6*	36,6*	27,0*	27,0*	19,7	22,3*	15,1	19,7*	14,6
	1.5 m t			18.1	19.2*	12.0	13.8*	8.8	11.0*	6.8	9.3*	6.5
	5 ft lb			39,0	41,4*	25,9	29,8*	19,0	23,8*	14,7	20,2*	14,3
	0 m t	7.5*	7.5*	17.7	19.7*	11.6	14.4*	8.6	11.4*	6.7	9.4*	6.6
	0 ft lb	17,4*	17,4*	38,0	42,6*	25,1	31,2*	18,5	24,6*			14,6
	-1.5 m t	14.8*	14.8*	17.6	18.9*	11.5	14.3*	8.5	11.2*			7.1
LC-V	-5 ft lb	33,5*	33,5*	37,9	41,1*	24,8	30,9*	18,3	24,2*			15,7
	-3.0 m t	22.9*	22.9*	17.2*	17.2*	11.6	13.2*	8.6	10.1*			8.2
	-10 ft lb	49,8*	49,8*	37,2*	37,2*	24,9	28,5*	18,5	21,7*			18,1
	-4.5 m t	18.0*	18.0*	13.9*	13.9*	10.6*	10.6*					9.4*
	-15 ft lb	38,7*	38,7*	29,9*	29,9*	22,4*	22,4*					20,6*
	-6.0 m t											
	-20 ft lb											
	9.0 m t											8.6*
	30 ft lb											8.6*
	7.5 m t							8.7*	8.7*			8.1*
	25 ft lb							18,6*	18,6*			17,9*
	6.0 m t							8.9*	8.9*			8.0*
	20 ft lb							19,5*	19,5*			17,6*
	4.5 m t	21.7*	21.7*	14.0*	14.0*	11.1*	11.1*	9.6*	9.6*	7.5	8.7*	7.4
	15 ft lb	45,9*	45,9*	30,1*	30,1*	24,0*	24,0*	20,8*	20,8*			16,3
	3.0 m t			17.2*	17.2*	12.6*	12.6*	9.6	10.3*	7.4	9.0*	6.9
LC-V	10 ft lb			37,1*	37,1*	27,3*	27,3*	20,6	22,5*	15,8	19,7*	15,3
	1.5 m t			19.0	19.3*	12.6	13.8*	9.3	11.0*	7.2	9.3*	6.8
	5 ft lb			40,9	41,6*	27,2	30,0*	20,0	23,9*	15,5	20,3*	15,1
	0 m t	8.2*	8.2*	18.6	19.6*	12.2	14.4*	9.0	11.4*	7.1	9.3*	7.0
	0 ft lb	18,8*	18,8*	40,0	42,6*	26,4	31,3*	19,5	24,7*			15,4
	-1.5 m t	15.5*	15.5*	18.6	18.8*	12.1	14.2*	9.0	11.2*			7.6
	-5 ft lb	34,9*	34,9*	39,9	40,9*	26,1	30,8*	19,3	24,1*			16,7
	-3.0 m t	22.6*	22.6*	17.0*	17.0*	12.2	13.0*	9.0	10.0*			8.8
	-10 ft lb	49,1*	49,1*	36,7*	36,7*	26,3	28,1*	19,6	21,3*			19,4
	-4.5 m t	17.5*	17.5*	13.6*	13.6*	10.2*	10.2*					9.3*
	-15 ft lb	37,5*	37,5*	29,1*	29,1*	21,6*	21,6*					20,5*
	-6.0 m t											
	-20 ft lb											

Stick 3.95 m / 13'

Under-carriage		3.0 m 10 ft		4.5 m 15 ft		6.0 m 20 ft		7.5 m 25 ft		9.0 m 30 ft		m ft in
S-HD	9.0 m t											6.7*
	30 ft lb											6.7*
	7.5 m t							7.7*	7.7*			6.4*
	25 ft lb							17,0*	17,0*			14,1*
	6.0 m t							8.0*	8.0*	6.8*	6.8*	6.3*
	20 ft lb							17,5*	17,5*			13,9*
	4.5 m t							8.7*	8.7*			6.4
	15 ft lb							18,9*	18,9*	15,4	17,5*	14,2*
	3.0 m t	13.0*	13.0*	15.3*	15.3*	11.5*	11.5*	9.1	9.6*	7.0	8.5*	6.0
	10 ft lb	33,1*	33,1*	32,9*	32,9*	24,9*	24,9*	19,7	20,8*	15,0	18,4*	13,3
	1.5 m t	7.1*	7.1*	18.0*	18.0*	12.0	13.0*	8.8	10.4*	6.8	8.9*	5.9
	5 ft lb	16,6*	16,6*	38,9*	38,9*	26,0	28,2*	18,9	22,6*	14,6	19,3*	13,0
	0 m t	10.0*	10.0*	17.6	19.3*	11.6	14.0*	8.5	11.0*	6.6	9.1*	6.0
	0 ft lb	22,8*	22,8*	37,9	41,8*	25,0	30,3*	18,3	23,9*	14,2	19,8*	13,2
	-1.5 m t	14.7*	14.7*	17.4	19.2*	11.3	14.2*	8.3	11.1*	6.5	9.0*	6.4
	-5 ft lb	33,1*	33,1*	37,3	41,7*	24,4	30,8*	18,0	24,1*	14,1	19,5*	14,0
LC-V	-3.0 m t	20.6*	20.6*	17.4	18.0*	11.3	13.6*	8.3	10.6*			7.2
	-10 ft lb	46,6*	46,6*	37,4	39,0*	24,4	29,4*	17,9	22,9*			15,9
	-4.5 m t	21.2*	21.2*	15.6*	15.6*	11.5	11.8*					8.9
	-15 ft lb	45,7*	45,7*	33,5*	33,5*	24,8	25,4*					19,8
	-6.0 m t			11.0*	11.0*							8.9*
	-20 ft lb			22,9*	22,9*							19,5*
	9.0 m t											6.7*
	30 ft lb											6.7*
	7.5 m t							7.7*	7.7*			6.4*
	25 ft lb							17,0*	17,0*			14,1*
	6.0 m t							8.1*	8.1*	7.0*	7.0*	6.3*
	20 ft lb							17,6*	17,6*			13,9*
	4.5 m t							8.8*	8.8*	7.5	8.1*	6.5*
	15 ft lb							19,1*	19,1*	16,2	17,6*	14,2*
	3.0 m t	11.4*	11.4*	15.6*	15.6*	11.6*	11.6*	9.6	9.7*	7.3	8.5*	6.4
LC-V	10 ft lb	28,7*	28,7*	33,5*	33,5*	25,2*	25,2*	20,7	21,0*	15,8	18,5*	14,0
	1.5 m t	7.2*	7.2*	18.2*	18.2*	12.6	13.1*	9.2	10.5*	7.1	8.9*	6.2
	5 ft lb	16,8*	16,8*	39,3*	39,3*	27,2	28,4*	19,9	22,8*	15,3	19,4*	13,7
	0 m t	10.4*	10.4*	18.5	19.3*	12.2	14.0*	8.9	11.0*	7.0	9.2*	6.4
	0 ft lb	23,5*	23,5*	39,9	41,9*	26,2	30,4*	19,3	23,9*	15,0	19,9*	14,0
	-1.5 m t	15.1*	15.1*	18.3	19.2*	12.0	14.2*	8.8	11.1*	6.9	9.0*	6.8
	-5 ft lb	34,1*	34,1*	39,4	41,5*	25,8	30,7*	19,0	24,1*			15,0
	-3.0 m t	21.2*	21.2*	17.9*	17.9*	11.9	13.5*	8.8	10.5*			7.7
	-10 ft lb	47,9*	47,9*	38,7*	38,7*	25,7	29,2*	19,0	22,6*			17,0
	-4.5 m t	20.7*	20.7*	15.3*	15.3*	11.6*	11.6*					9.3*
	-15 ft lb	44,7*	44,7*	32,9*	32,9*	24,8*	24,8*					20,4*
	-6.0 m t			10.4*	10.4*							8.8*
	-20 ft lb			21,6*	21,6*							19,2*

Height
 Can be slewed through 360°
 In longitudinal position of undercarriage
 Max. reach
 * Limited by hydr. capacity

The load values are quoted in tons (t) / lb x 1,000 at stick end (without bucket), and may be swung 360° on firm and even ground. Adjacent values are valid for the undercarriage when in the longitudinal position. Capacities are valid for 750 mm / 30" wide track pads. Indicated loads are based on ISO 10567 standard and do not exceed 75% of tipping or 87% of hydraulic capacity (indicated via *). Without bucket cylinder, link and lever the lift capacities will increase by 495 kg / 1,090 lb. Lifting capacity of the excavator is limited by machine stability and hydraulic capacity.

Lift Capacities

with Mono Boom SME 6.15 m/20'2", Counterweight 8.4 t/18,520 lb and Track Pads 750 mm/30"

Stick SME 2.15 m/7'1"

Under-carriage		3.0 m 10 ft		4.5 m 15 ft		6.0 m 20 ft		7.5 m 25 ft		9.0 m 30 ft		m ft in	
S-HD	7.5 m t					11.2*	11.2*					11.2*	11.2*
	25 ft lb											24.9*	24.9*
	6.0 m t					11.4*	11.4*					9.7	10.7*
	20 ft lb					24.9*	24.9*					21.6	23.7*
	4.5 m t			16.1*	16.1*	12.2	12.5*	8.7	10.8*			8.3	10.6*
	15 ft lb			34.6*	34.6*	26.4	27.0*	18.8	23.6*			18.4	23.4*
	3.0 m t			17.5	19.0*	11.6	13.7*	8.5	11.3*			7.7	10.7*
	10 ft lb			37.8	40.8*	25.1	29.7*	18.3	24.5*			16.9	23.5*
	1.5 m t			16.9	19.2*	11.2	14.6*	8.3	11.6*			7.5	10.8*
	5 ft lb			36.3	43.2*	24.2	31.5*	17.9	25.2*			16.5	23.8*
LC-V	0 m t			16.8	19.3*	11.0	14.6*	8.2	11.5*			7.8	10.9*
	0 ft lb			36.0	41.9*	23.7	31.7*	17.6	24.8*			17.1	24.1*
	-1.5 m t	19.7*	19.7*	16.9	17.6*	11.0	13.7*					8.7	11.0*
	-5 ft lb	44.9*	44.9*	36.3	38.3*	23.7	29.6*					19.1	24.2*
	-3.0 m t	17.4*	17.4*	14.6*	14.6*	11.1*	11.1*					10.6*	10.6*
	-10 ft lb	37.9*	37.9*	31.5*	31.5*	23.6*	23.6*					23.4*	23.4*
	-4.5 m t												
	-15 ft lb												
	7.5 m t					11.2*	11.2*					11.2*	11.2*
	25 ft lb											24.7*	24.7*
LC-V	6.0 m t			13.6*	13.6*	11.5*	11.5*					10.0	10.7*
	20 ft lb			29.3*	29.3*	25.0*	25.0*					22.4	23.7*
	4.5 m t			16.4*	16.4*	12.6*	12.6*	9.2	10.8*			8.7	10.6*
	15 ft lb			35.2*	35.2*	27.3*	27.3*	19.8	23.6*			19.2	23.4*
	3.0 m t			18.4	19.2*	12.2	13.8*	8.9	11.3*			8.1	10.7*
	10 ft lb			39.7	41.2*	26.4	29.9*	19.3	24.6*			17.8	23.5*
	1.5 m t			17.8	19.5*	11.8	14.6*	8.7	11.6*			7.9	10.8*
	5 ft lb			38.3	43.2*	25.5	31.6*	18.8	25.2*			17.5	23.8*
	0 m t			17.7	19.2*	11.6	14.6*	8.6	11.4*			8.3	10.9*
	0 ft lb			38.1	41.7*	25.1	31.6*	18.6	24.7*			18.2	24.1*
LC-V	-1.5 m t	20.4*	20.4*	17.4*	17.4*	11.6	13.5*					9.3	11.0*
	-5 ft lb	44.9*	44.9*	37.9*	37.9*	25.1	29.3*					20.5	24.2*
	-3.0 m t	17.0*	17.0*	14.2*	14.2*	10.7*	10.7*					10.5*	10.5*
	-10 ft lb	37.0*	37.0*	30.8*	30.8*							23.2*	23.2*
	-4.5 m t												
	-15 ft lb												

Stick SME 2.60 m/8'6"

Under-carriage		3.0 m 10 ft		4.5 m 15 ft		6.0 m 20 ft		7.5 m 25 ft		9.0 m 30 ft		m ft in	
S-HD	7.5 m t					10.3*	10.3*					10.3*	10.3*
	25 ft lb					22.8*	22.8*					22.7*	22.7*
	6.0 m t					10.7*	10.7*	9.0	10.0*			8.8	9.9*
	20 ft lb					23.4*	23.4*					19.7	22.0*
	4.5 m t			15.0*	15.0*	11.9*	11.9*	8.8	10.3*			7.7	9.9*
	15 ft lb			32.4*	32.4*	25.7*	25.7*	18.9	22.5*			17.0	21.8*
	3.0 m t			17.8	18.1*	11.7	13.2*	8.5	10.9*			7.1	10.0*
	10 ft lb			38.5	38.9*	25.3	28.6*	18.3	23.7*			15.7	22.0*
	1.5 m t			17.0	19.7*	11.2	14.3*	8.2	11.4*			6.9	10.1*
	5 ft lb			36.5	42.7*	24.2	30.9*	17.8	24.7*			15.3	22.3*
LC-V	0 m t			16.7	19.6*	10.9	14.6*	8.1	11.5*			7.2	10.3*
	0 ft lb			35.9	42.6*	23.6	31.6*	17.4	24.9*			15.8	22.7*
	-1.5 m t	18.5*	18.5*	16.7	18.3*	10.9	14.0*	8.1	10.8*			7.9	10.4*
	-5 ft lb	41.9*	41.9*	35.9	39.8*	23.5	30.3*	17.5	23.1*			17.4	23.0*
	-3.0 m t	20.0*	20.0*	15.7*	15.7*	11.1	12.1*					9.5	10.3*
	-10 ft lb	43.4*	43.4*	34.0*	34.0*	23.9	25.9*					21.2	22.7*
	-4.5 m t			10.8*	10.8*							9.2*	9.2*
	-15 ft lb			22.7*	22.7*							20.1*	20.1*
	7.5 m t					10.3*	10.3*					10.2*	10.2*
	25 ft lb					22.7*	22.7*					22.6*	22.6*
LC-V	6.0 m t					10.8*	10.8*	9.4	10.0*			9.1	9.9*
	20 ft lb					23.5*	23.5*					20.4	21.9*
	4.5 m t			15.3*	15.3*	12.0*	12.0*	9.2	10.3*			8.0	9.9*
	15 ft lb			32.9*	32.9*	26.0*	26.0*	19.9	22.6*			17.8	21.8*
	3.0 m t			18.3*	18.3*	12.3	13.3*	8.9	10.9*			7.5	10.0*
	10 ft lb			39.4*	39.4*	26.5	28.9*	19.3	23.8*			16.5	22.0*
	1.5 m t			17.9	19.8*	11.8	14.3*	8.7	11.4*			7.4	10.1*
	5 ft lb			38.5	42.8*	25.5	31.0*	18.7	24.8*			16.2	22.3*
	0 m t			17.6	19.6*	11.6	14.6*	8.5	11.5*			7.6	10.3*
	0 ft lb			37.9	42.5*	24.9	31.6*	18.4	24.8*			16.8	22.7*
LC-V	-1.5 m t	19.4*	19.4*	17.7	18.2*	11.5	13.9*	8.6	10.6*			8.4	10.4*
	-5 ft lb	44.0*	44.0*	38.0	39.4*	24.9	30.0*					18.6	23.0*
	-3.0 m t	19.6*	19.6*	15.4*	15.4*	11.7	11.8*					10.3*	10.3*
	-10 ft lb	42.5*	42.5*	33.4*	33.4*	25.3*	25.3*					22.7*	22.7*
	-4.5 m t												
	-15 ft lb												

Height Can be slewed through 360° In longitudinal position of undercarriage Max. reach * Limited by hydr. capacity

The load values are quoted in tons (t)/lb x 1,000 at stick end (without bucket), and may be swung 360° on firm and even ground. Adjacent values are valid for the undercarriage when in the longitudinal position. Capacities are valid for 750 mm/30" wide track pads. Indicated loads are based on ISO 10567 standard and do not exceed 75% of tipping or 87% of hydraulic capacity (indicated via *). Without bucket cylinder, link and lever the lift capacities will increase by 590 kg/1,300 lb. Lifting capacity of the excavator is limited by machine stability and hydraulic capacity.

Lift Capacities

with Mono Boom SME 6.15 m/20'2", Counterweight 9.4 t/20,720 lb and Track Pads 750 mm/30"

Stick SME 2.15 m/7'1"

Under-carriage	Height	3.0 m 10 ft		4.5 m 15 ft		6.0 m 20 ft		7.5 m 25 ft		9.0 m 30 ft		Max. reach	
		t	lb	t	lb	t	lb	t	lb	t	lb	m	ft in
S-HD	7.5 m t					11.2*	11.2*					11.2*	11.2*
	25 ft lb											24.9*	24.9*
	6.0 m t					11.4*	11.4*					10.3	10.7*
	20 ft lb					24.9*	24.9*					23.0	23.7*
	4.5 m t			16.1*	16.1*	12.5*	12.5*	9.3	10.8*			8.9	10.6*
	15 ft lb			34.6*	34.6*	27.0*	27.0*	20.1	23.6*			19.6	23.4*
	3.0 m t			18.7	19.0*	12.4	13.7*	9.1	11.3*			8.2	10.7*
	10 ft lb			40.3	40.8*	26.8	29.7*	19.6	24.5*			18.1	23.5*
	1.5 m t			18.0	19.2*	12.0	14.6*	8.8	11.6*			8.0	10.8*
	5 ft lb			38.8	43.2*	25.8	31.5*	19.1	25.2*			17.7	23.8*
LC-V	0 m t			17.9	19.3*	11.8	14.6*	8.7	11.5*			8.3	10.9*
	0 ft lb			38.5	41.9*	25.4	31.7*	18.9	24.8*			18.3	24.1*
	-1.5 m t	19.7*	19.7*	17.6*	17.6*	11.8	13.7*					9.3	11.0*
	-5 ft lb	44.9*	44.9*	38.3*	38.3*	25.4	29.6*					20.5	24.2*
	-3.0 m t	17.4*	17.4*	14.6*	14.6*	11.1*	11.1*					10.6*	10.6*
	-10 ft lb	37.9*	37.9*	31.5*	31.5*	23.6*	23.6*					23.4*	23.4*
	-4.5 m t												
	-15 ft lb												
	7.5 m t					11.2*	11.2*					11.2*	11.2*
	25 ft lb											24.7*	24.7*
LC-V	6.0 m t			13.6*	13.6*	11.5*	11.5*					10.6	10.7*
	20 ft lb			29.3*	29.3*	25.0*	25.0*					23.7*	23.7*
	4.5 m t			16.4*	16.4*	12.6*	12.6*	9.8	10.8*			9.2	10.6*
	15 ft lb			35.2*	35.2*	27.3*	27.3*	21.0	23.6*			20.4	23.4*
	3.0 m t			19.2*	19.2*	13.0	13.8*	9.5	11.3*			8.6	10.7*
	10 ft lb			41.2*	41.2*	28.0	29.9*	20.5	24.6*			18.9	23.5*
	1.5 m t			18.9	19.5*	12.6	14.6*	9.3	11.6*			8.4	10.8*
	5 ft lb			40.8	43.2*	27.1	31.6*	20.1	25.2*			18.6	23.8*
	0 m t			18.8	19.2*	12.4	14.6*	9.2	11.4*			8.8	10.9*
	0 ft lb			40.5	41.7*	26.7	31.6*	19.9	24.7*			19.4	24.1*
LC-V	-1.5 m t	20.4*	20.4*	17.4*	17.4*	12.4	13.5*					9.9	11.0*
	-5 ft lb	44.9*	44.9*	37.9*	37.9*	26.8	29.3*					21.9	24.2*
	-3.0 m t	17.0*	17.0*	14.2*	14.2*	10.7*	10.7*					10.5*	10.5*
	-10 ft lb	37.0*	37.0*	30.8*	30.8*							23.2*	23.2*
	-4.5 m t												
	-15 ft lb												

Stick SME 2.60 m/8'6"

Under-carriage	Height	3.0 m 10 ft		4.5 m 15 ft		6.0 m 20 ft		7.5 m 25 ft		9.0 m 30 ft		Max. reach	
		t	lb	t	lb	t	lb	t	lb	t	lb	m	ft in
S-HD	7.5 m t					10.3*	10.3*					10.3*	10.3*
	25 ft lb					22.8*	22.8*					22.7*	22.7*
	6.0 m t					10.7*	10.7*	9.5	10.0*			9.4	9.9*
	20 ft lb					23.4*	23.4*					20.9	22.0*
	4.5 m t			15.0*	15.0*	11.9*	11.9*	9.3	10.3*			8.2	9.9*
	15 ft lb			32.4*	32.4*	25.7*	25.7*	20.1	22.5*			18.1	21.8*
	3.0 m t			18.1*	18.1*	12.5	13.2*	9.1	10.9*			7.6	10.0*
	10 ft lb			38.9*	38.9*	26.9	28.6*	19.5	23.7*			16.8	22.0*
	1.5 m t			18.1	19.7*	12.0	14.3*	8.8	11.4*			7.4	10.1*
	5 ft lb			39.0	42.7*	25.9	30.9*	19.0	24.7*			16.4	22.3*
LC-V	0 m t			17.8	19.6*	11.7	14.6*	8.6	11.5*			7.7	10.3*
	0 ft lb			38.4	42.6*	25.3	31.6*	18.7	24.9*			16.9	22.7*
	-1.5 m t	18.5*	18.5*	17.9	18.3*	11.7	14.0*	8.6	10.8*			8.4	10.4*
	-5 ft lb	41.9*	41.9*	38.4	39.8*	25.1	30.3*	18.7	23.1*			18.6	23.0*
	-3.0 m t	20.0*	20.0*	15.7*	15.7*	11.8	12.1*					10.2	10.3*
	-10 ft lb	43.4*	43.4*	34.0*	34.0*	25.5	25.9*					22.7	22.7*
	-4.5 m t			10.8*	10.8*							9.2*	9.2*
	-15 ft lb			22.7*	22.7*							20.1*	20.1*
	7.5 m t					10.3*	10.3*					10.2*	10.2*
	25 ft lb					22.7*	22.7*					22.6*	22.6*
LC-V	6.0 m t					10.8*	10.8*	10.0*	10.0*			9.7	9.9*
	20 ft lb					23.5*	23.5*					21.6	21.9*
	4.5 m t			15.3*	15.3*	12.0*	12.0*	9.8	10.3*			8.5	9.9*
	15 ft lb			32.9*	32.9*	26.0*	26.0*	21.1	22.6*			18.9	21.8*
	3.0 m t			18.3*	18.3*	13.1	13.3*	9.5	10.9*			8.0	10.0*
	10 ft lb			39.4*	39.4*	28.2	28.9*	20.5	23.8*			17.6	22.0*
	1.5 m t			19.0	19.8*	12.6	14.3*	9.3	11.4*			7.8	10.1*
	5 ft lb			41.0	42.8*	27.1	31.0*	20.0	24.8*			17.3	22.3*
	0 m t			18.8	19.6*	12.3	14.6*	9.1	11.5*			8.1	10.3*
	0 ft lb			40.4	42.5*	26.6	31.6*	19.7	24.8*			17.9	22.7*
LC-V	-1.5 m t	19.4*	19.4*	18.2*	18.2*	12.3	13.9*	9.1	10.6*			9.0	10.4*
	-5 ft lb	44.0*	44.0*	39.4*	39.4*	26.5	30.0*					19.9	23.0*
	-3.0 m t	19.6*	19.6*	15.4*	15.4*	11.8*	11.8*					10.3*	10.3*
	-10 ft lb	42.5*	42.5*	33.4*	33.4*	25.3*	25.3*					22.7*	22.7*
	-4.5 m t												
	-15 ft lb												

Height
 Can be slewed through 360°
 In longitudinal position of undercarriage
 Max. reach
 * Limited by hydr. capacity

The load values are quoted in tons (t)/lb x 1,000 at stick end (without bucket), and may be swung 360° on firm and even ground. Adjacent values are valid for the undercarriage when in the longitudinal position. Capacities are valid for 750 mm/30" wide track pads. Indicated loads are based on ISO 10567 standard and do not exceed 75% of tipping or 87% of hydraulic capacity (indicated via *). Without bucket cylinder, link and lever the lift capacities will increase by 590 kg/1,300 lb. Lifting capacity of the excavator is limited by machine stability and hydraulic capacity.

Serial Equipment

Undercarriage

Lashing eyes
Sprocket with dirt ejector
Track and carrier rollers, sealed and lifetime-lubricated

Uppercarriage

Access platforms without protruding parts
Anti-skid surfaces
Automatic swing brake lock
DEF tank filling indicator
DEF tank lockable access hatch
Engine coolant level, visible from the cab
Engine hood with gas spring opening
Filters accessible from ground level
Handrails
Hydraulic oil level, visible from ground level
Lockable fuel tank cap
Lockable service doors
Lockable storage and accessories compartment
Lockable storage box
Main switch, electric, with timer
Main switch, manual, lockable
Protection grid on radiator fan
Safe uppercarriage side access platform
Sound insulation
Swing drive gearbox oil level, visible from the cab
Swing-out radiators
Windshield washer fluid tank, accessible from ground level

Hydraulic System

Dedicated swing circuit
Filter with integrated fine filters
Hydraulic pressure measuring ports
Liebherr Positive Control system with 2 independent circuits
Magnetic rod
Pressure accumulator for controlled lowering of equipment with engine turned off

Engine

Air filter with automatic dust ejector
Automatic engine idling / speed increase, controlled via joystick sensors
Common-Rail injection system
Exhaust gas after-treatment system – SCR
Fixed geometry turbocharger
Fuel fine filter
Fuel pre-filter and water separator
Fuel priming pump
Intercooler
Power Pack US EPA Tier 4 Final
Stepless adjustable engine speed

Operator's Cab

7" multifunction color touchscreen
Air conditioning, automatic, tri-zone, controlled via display
Armrests adjustable in width, height and inclination
Bottle holder
Cab air filters housing, accessible from ground level
Cab door sliding windows
Cigarette lighter
Coat hook
DEF consumption on touchscreen
DEF level on touchscreen
Electric socket in cabin (12 V)
Electric socket in cabin (24 V)
Emergency hammer
Engine oil level on touchscreen
Fuel consumption on touchscreen
Fuel level on touchscreen
Hydraulic oil level on touchscreen
Interior lighting
Laminated right hand side window
LiDAT Plus (Liebherr data transfer system)*
Mechanical hour meters, visible from ground level
Mobile phone storage net
Movement priority between swing and boom, adjustable via touchscreen
Movement priority for stick-in, adjustable via touchscreen
Rain hood over front window opening
Rearview mirror
Rear view monitoring camera
Rear window emergency exit
Right hand side view monitoring camera
Roll-down sun blinds for windscreen and roof window
ROPS safety cab structure (ISO 12117-2)
Rubber floor mat, fixed on floor and removable
Shortcut button on joystick configurable
Storage box
Storage nets
Storage spaces
Swing braking torque adjustable via touchscreen
Tilttable console left
Tinted windows
Visco-elastic damping
Windscreen wiper and washer
Work mode selector

Equipment

Anti-drift system boom cylinders
Anti-drift system stick cylinder
Boom cylinders regeneration
Pipe fracture safety valve for stick cylinder
Pipe fracture safety valves for boom cylinders
Pivot points made of cast steel
SAE split flanges on high pressure lines
Stick cylinder regeneration

* optionally extendable after one year

Equipment Standard/Option

Undercarriage

Chain guide 3 pieces	•
Chain guide 4 pieces	+
Chain guide full length	+
Cover and base plate for undercarriage center section	•
Reinforced cover and base plate for center section (LC-V undercarriage)	+
Reinforced cover plate for center section (LC-V undercarriage)	+
Screws protection for sideframe (LC-V undercarriage)	+
Special painting	+
Steps	•
Steps wide	+
Track pads triple grouser reinforced 600 mm / 24"	+
Track pads triple grouser reinforced 750 mm / 30" / 900 mm / 35"	•
Tracks, sealed and greased, reinforced	•
Travel drive gearbox protection	+
Travel motor housing protection	+
Undercarriage LC-V	+
Undercarriage S-HD	•

Uppercarriage

Air pre-filter with cyclonical dust trap	+
Boxing ring	+
Centralized lubrication system (automatic)	•
Centralized lubrication system (manual)	+
Counterweight heavy 9.4 t / 20,720 lb	+
Counterweight standard 8.4 t / 18,520 lb	•
Electric socket on uppercarriage (24 V)	+
Extended tool set including tool box	+
External starting aid (24 V)	+
Fuel anti-theft protection	+
Headlight on uppercarriage, front left, LED+, 1 piece, protection included	+ ¹⁾
Headlight on uppercarriage, front right, LED, 1 piece, protection included	• ¹⁾
Headlight on uppercarriage, front right, LED+, 1 piece, protection included	+ ¹⁾
Headlight on uppercarriage, lateral left, LED+, 1 piece	+ ¹⁾
Headlight on uppercarriage, lateral right, LED+, 1 piece	+ ¹⁾
Headlights on uppercarriage, rear, LED+, 2 pieces	+ ¹⁾
Lighting for tank area	+ ¹⁾
Lighting for uppercarriage access	+ ¹⁾
Pre-heating system for fuel	+
Radiator fine mesh protection grid	+
Reflective warning stickers	+
Reversible fan drive	+
Skyview 360°	+
Special painting	+
Tank refilling pump fuel	+
Tool set including storage case	•
Uppercarriage bottom and side protection	+
Uppercarriage bottom closure sheets	•



Hydraulic System

Bypass filter for hydraulic oil	+
Liebherr hydraulic oil	•
Liebherr hydraulic oil, adapted for extreme climate conditions	+
Liebherr hydraulic oil, biodegradable	+



Engine

Automatic engine shutdown after idling	+
Engine shut-down with overrun	+
Lighting for engine compartment	+ ¹⁾

Equipment Standard/Option



Operator's Cab

3" seat belt with retractor, orange color	•
4-points seat belt	+
Acoustic travel alarm deactivatable	+
Auxiliary heater programmable	+
Bottom windscreen wiper	+
Cool box (12 V)	+
Dark tinted windows	+
Electrically adjustable and heated outside rear-view mirrors	+
Electronic immobilizer	+
Emergency stop in cab	+
FGPS front guard	+
FGPS front guard tiltable	+
Filter for hydraulic hammer return flow	+
Fire extinguisher	+
First-aid box	+
Footrest	+
FOPS top guard	+
FOPS top guard flat	+
Handrests elevated for joysticks	+
Headlights on cab, front, LED, 2 pieces	• ¹⁾
Headlights on cab, front, LED+, 2 pieces	+ ¹⁾
Headlights on cab roof, front, LED+, 2 pieces	+ ¹⁾
High pressure circuit bypass	+
High pressure circuit switchable on pedals or mini-joystick	+
High pressure circuit with Tool Control (20 attachment adjustments on display)	+
Impact resistant one-piece windscreen	+
Impact resistant roof window	+
Integral protection guard	+
Laminated roof window	•
Luminosity control (LED+ headlights)	+ ¹⁾
Medium pressure circuit	+
Mini-joysticks proportional	•
Movement restriction for boom	+
Movement restriction for stick	+
Operator seat Comfort	•
Operator seat Premium	+
Overload warning system	+
Preparation for machine guidance system	+
Preparation for tiltrotator	+
Preparation for weighing system	+
Radio Comfort	+
Radio pre-installation	•
Retractable laminated two-piece windscreen	•
Roof sun shield	+
Roof window wiper	+
Rotating beacon on cabin, LED, 1 piece	+
Seat belt reminder	+
Special painting	+
Sun visor	+
Switch between high pressure and bucket cylinder controls	+
Windscreen bottom protection grid	+



Equipment

Boom bottom protection	+
Bucket cylinder rod protection	+
Centralized lubrication extended for connecting link	+
Floating boom	+
Headlight guard on boom, right	+
Headlight guards on boom, right and left	+
Headlight on boom, left, LED+, 1 piece	+ ¹⁾
Headlight on boom, right, LED, 1 piece	• ¹⁾
Headlight on boom, right, LED+, 1 piece	+ ¹⁾
Headlight on stick, bottom, LED+, 1 piece	+ ¹⁾
LIKUFIX electric signal plug	+
LIKUFIX for quick coupler SWA 66 hydraulic	+
Mono boom 6.45 m / 21'2"	+
Mono boom SME 6.15 m / 20'2"	+
Quick coupler SWA 66 hydraulic	+
Quick coupler SWA 66 mechanical	+
Special painting	+
Stick 2.60 m / 8'6"	+
Stick 2.90 m / 9'6"	+
Stick 3.25 m / 10'8"	+
Stick 3.95 m / 13'	+
Stick SME 2.15 m / 7'1"	+
Stick SME 2.60 m / 8'6"	+
Stick bottom protection	+
Tool Management	+

• = Standard, + = Option

¹⁾ Equipment not individually available, but only as predefined lighting packages
Non-exhaustive list, please contact us for further information.

Options and/or special equipments, supplied by vendors other than Liebherr, are only to be installed with the knowledge and approval of Liebherr in order to retain warranty.

Liebherr USA, Co.

Construction Equipment Division
4100 Chestnut Avenue, Newport News, VA 23607, USA
☎ +1 (757) 245 5251, Fax +1 (757) 928 8701
www.liebherr.us, E-Mail: Construction.USA@liebherr.com
www.facebook.com/LiebherrConstruction